


COMpact 2BRI Module



Expansion module for COMpact systems with two variable ISDN ports (external/internal)

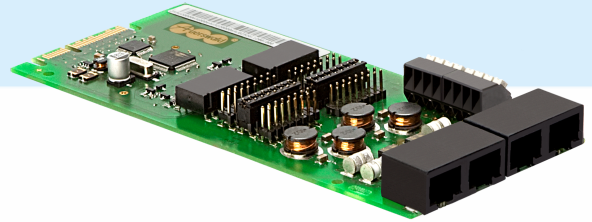

- 2 ISDN ports, switchable external (S_0) – internal (S_0/U_{P0})
- Internal either as S_0 (4-wire) or U_{P0} port (2-wire), point-to-multipoint, Euro ISDN (DSS-1)
- System telephony function in conjunction with COMfortel® 1200, 1400, 1600 and 2600

Your advantages in detail

The COMpact 2BRI Module the ITC systems COMpact 4000, 5000/5000R, 5200/5000R und 5500R by two switchable ISDN ports. Both ports can be configured as external or internal ISDN ports. In internal operation

mode S_0 (4-wire) or U_{P0} (2-wire) can be selected. ISDN system telephones from the COMfortel series and normal ISDN terminals can be operated on the internal ISDN ports.

Features at a glance

MODULE CONNECTION OPTIONS

- 2 ISDN ports, switchable external (S_0) – internal (S_0/U_{P0})

MODULE FUNCTIONS

- Internal alternatively as S_0 (4-wire) or U_{P0} port (2-wire), point-to-multipoint, Euro-ISDN (DSS-1)
- System telephony function in connection with COMfortel 1200, 1400, 1600 and 2600

COMPATIBLE PRODUCTS

- 90118 / COMpact 4000

- 90334 / COMpact 5200
- 90335 / COMpact 5200R
- 90336 / COMpact 5500R

TECHNICAL SPECIFICATIONS

- Trunk line: 0-1 S_0 port, Euro-ISDN (DSS-1), Point-to-Multipoint or Point-to-Point supported
- Internal ISDN port: 0-1 S_0/U_{P0} port, Euro-ISDN (DSS-1), Point-to-Multipoint supported

DELIVERY

- COMpact 2BRI Module

ORDERING INFORMATION

Designation: **COMpact 2BRI Module**

Article number: **90131**

EAN Code: **4019377901311**